

OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER

SECTION 25 TOWNSHIP 15 RANGE 3

DATE: 5-11-05 11-11-05

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Note: Harrison

METHOD OF ESTABLISHMENT: County: 10-5-99

IN. S.P.C. E ZONE NAD '83



NAME: 15032505

N: 496013.0093(m)

E: 58639.5123(m)

NOTE: This corner position  
represents a title corner  
and may not necessarily  
be in the position of the  
Record corner.

Note: Dug 1  
brass plug in  
concrete 04

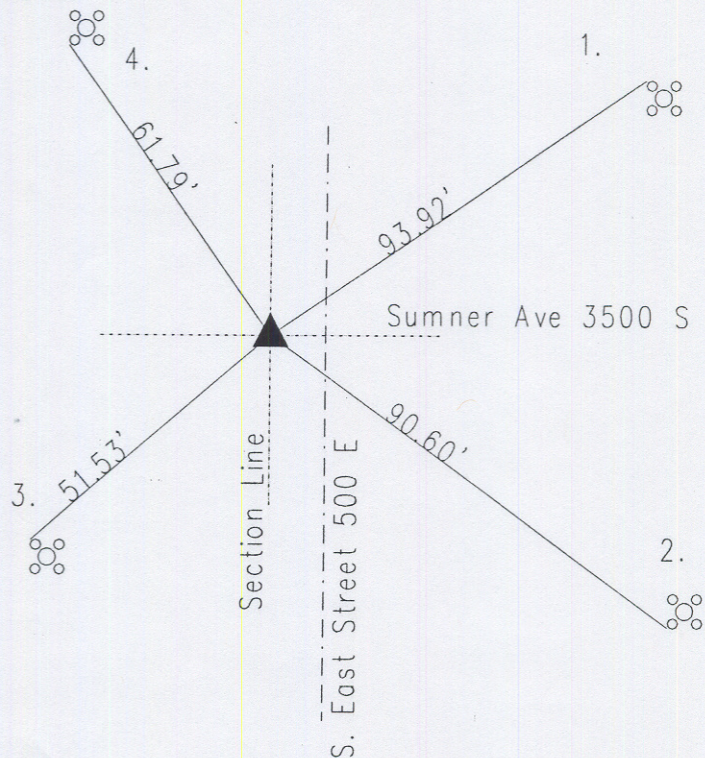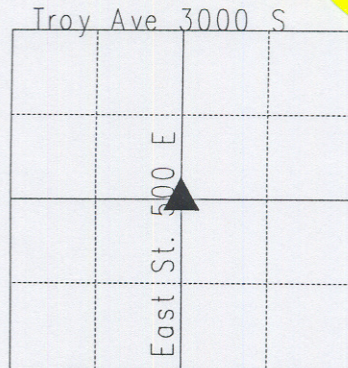

15032505

REF.	DISTANCE	DESCRIPTION
1.	93.92'	Cut 'x' NW bolt aluminum pole base
2.	90.60'	Cut 'x' SW bolt aluminum pole base
3.	51.53'	Cut 'x' NW bolt aluminum pole base
4.	61.79'	Cut 'x' SW bolt aluminum pole base

15032505 Center

CORNER HISTORY: No reference to the center of section per the Marion County Atlas pg. 6 by Wm. B. Laughlin. A survey by D. B. Hosbrook dated 4-26-1853 called surveyed NEQ. Center section witness 24" beech S 21  $\frac{1}{2}$  W 45 links; 22" beech S 20 E 48 links per Perry Township Legal Survey Book pg. 25. A Legal Survey by P.R. Brown dated 6-9-1942 called brass plug per Perry Township Legal Survey Book pg. 84. Reference dated 1-31-72 by McLand called PK nail found. Reference dated 2-3-72 by McLand called brass pin found 4" down. Reference dated 9-25-75 by Miller called found PK nail over brass plug. Reference dated 2-6-87 by Green called re-checked found brass plug down 5" . Reference dated 7-21-93 by Greene called found PK nail. Reference dated 10-5-99 by Kiste called found PK nail @ surface found brass plug 5" down. Reference dated 2004 by Wilcoxon called dug and found brass plug in old concrete. Reference dated 11-9-05 by Wilcoxon called found brass plug 6" down; found old wooden stake 19" down; under brass plug set Harrison where the brass plug was.